
default*values*

Release 0.0.10

Dominic Davis-Foster

Sep 11, 2020

CONTENTS

1 Installation	3
2 Usage	5
3 API Reference	9
4 Demo	11
5 Overview	13
6 Coding style	15
7 Automated tests	17
8 Type Annotations	19
9 Build documentation locally	21
10 Downloading source code	23
10.1 Building from source	23
Python Module Index	25
Index	27

Sphinx extension to show default values in documentation.

Docs	
Tests	
PyPI	
Activity	
Other	

**CHAPTER
ONE**

INSTALLATION

from PyPI

```
$ python3 -m pip install default_values --user
```

from GitHub

```
$ python3 -m pip install git+https://github.com/domdfcoding/default_values@master --user
```

Enable `default_values` by adding the following to the `extensions` variable in your `conf.py`:

```
extensions = [  
    ...  
    'sphinxcontrib.default_values',  
]
```

For more information see <https://www.sphinx-doc.org/en/master/usage/extensions/index.html#third-party-extensions>

USAGE

This extension shows the default values in autodoc-formatted docstrings.

The default behaviour of autodoc is to turn this:

```
def namedlist(name: str = "NamedList") -> Callable:  
    """  
    A factory function to return a custom list subclass with a name.  
  
    :param name: The name of the list.  
    :default name: :py:obj:`True`  
  
    :return:  
    """
```

into this:

[domdf_python_tools.bases.namedlist\(name='NamedList'\)](#) [\[source\]](#)

A factory function to return a custom list subclass with a name.

Parameters

name (`str`) – The name of the list.

Return type

`Callable`

Returns

With `default_values` enabled, the documentation will now look like this:

domdf_python_tools.bases.namedlist(name='NamedList') [\[source\]](#)

A factory function to return a custom list subclass with a name.

Parameters

name (`str`) – The name of the list. Default `'NamedList'`.

Return type

`Callable`

Returns

Default values are taken from the function/class signature. They can be overridden using the `:default <argname>: <default value>` option in the docstring:

```
:param name: The name of the list.  
:default name: :py:obj:`True`
```

which will produce:

domdf_python_tools.bases.namedlist(name='NamedList') [\[source\]](#)

A factory function to return a custom list subclass with a name.

Parameters

name (`str`) – The name of the list. Default `True`.

Return type

`Callable`

Returns

The value must be formatted how you would like it to be displayed in Sphinx. This can be useful when the default value in the signature is `None` and the true default value is assigned in the function body, such as for a mutable default argument.

The default value can be suppressed using the `:no-default <argname>` option:

```
:param name: The name of the list.  
:no-default name:
```

domdf_python_tools.bases.namedlist(name='NamedList') [source]

A factory function to return a custom list subclass with a name.

Parameters

name (`str`) – The name of the list.

Return type

`Callable`

Returns

This allows for default values to be suppressed on a per-argument basis.

No default value is shown if the argument does not have a default value.

The formatting of the default value can be customised using the `default_description_format` option in `setup.py`. By default this is '`Default %s`'.

CHAPTER THREE

API REFERENCE

A Sphinx directive to specify that a module has extra requirements, and show how to install them.

Functions:

<code>process_docstring(app, what, name, obj, ...)</code>	Add default values to the docstring.
<code>process_default_format(app)</code>	Prepare the formatting of the default value.
<code>setup(app)</code>	Setup Sphinx Extension.

`sphinxcontrib.default_values.process_default_format(app)`

Prepare the formatting of the default value.

Parameters `app` (`Sphinx`) –

Return type `None`

`sphinxcontrib.default_values.process_docstring(app, what, name, obj, options, lines)`

Add default values to the docstring.

Parameters

- `app` (`Sphinx`) –
- `what` –
- `name` –
- `obj` –
- `options` –
- `lines` (`List[str]`) – List of strings representing the current contents of the docstring.

Return type `None`

`sphinxcontrib.default_values.setup(app)`

Setup Sphinx Extension.

Parameters `app` (`Sphinx`) –

Return type `Dict[str, Any]`

Returns

CHAPTER FOUR

DEMO

```
sphinxcontrib.default_values.demo.demo(a, b=0.0, c='', d=' ', e='hello world', f=(),  
g=Decimal('12.34'), h=1234, i=None, j=None,  
k=None, l='', m='\t', n=Ellipsis)
```

Parameters

- **a** (`Any`) – No default.
- **b** (`float`) – A float. Default `0.0`.
- **c** (`str`) – An empty string. Default `''`.
- **d** (`str`) – A space (or a smiley face?). Default `' '`.
- **e** (`str`) – A string. Default `'hello_world'`.
- **f** (`Tuple`) – A Tuple. Default `()`.
- **g** (`Decimal`) – A Decimal. Default `Decimal('12.34')`.
- **h** (`int`) – An int. Default `1234`.
- **i** (`Optional[List[str]]`) – Default `None`. Default `None`.
- **j** (`Optional[List[str]]`) – Overridden default. Default `[]`.
- **k** (`Optional[List[str]]`) – Suppressed default.
- **l** (`str`) – This is a really long description. It spans multiple lines. The quick brown fox jumps over the lazy dog. The default value should be added at the end regardless. Default `''`.
- **m** (`str`) – Tab. Default `'\t'`.
- **n** (`Any`) – This argument's default value is undefined.

The description for `d` lacked a fullstop at the end, but one was added automatically.

The default value of `n` was `Ellipsis`, but it wasn't shown.

The above example was created from the following Python code:

```
1 # stdlib  
2 from decimal import Decimal # pragma: no cover  
3 from typing import Any, List, Optional, Tuple # pragma: no cover  
4  
5 __all__ = ["demo"] # pragma: no cover  
6  
7  
8 def demo (
```

(continues on next page)

(continued from previous page)

```
9      a: Any,
10     b: float = 0.0,
11     c: str = '',
12     d: str = ' ',
13     e: str = "hello world",
14     f: Tuple = (),
15     g: Decimal = Decimal("12.34"),
16     h: int = 1234,
17     i: Optional[List[str]] = None,
18     j: Optional[List[str]] = None,
19     k: Optional[List[str]] = None,
20     l: str = '',
21     m: str = "\t",
22     n: Any = ...,
23     ): # pragma: no cover
24 """
25
26 :param a: No default.
27 :param b: A float.
28 :param c: An empty string.
29 :param d: A space (or a smiley face?)
30 :param e: A string.
31 :param f: A Tuple.
32 :param g: A Decimal.
33 :param h: An int.
34 :param i: Default None.
35 :param j: Overridden default.
36 :default j: ``[]``
37 :param k: Suppressed default.
38 :no-default k:
39 :param l: This is a really long description.
40     It spans multiple lines.
41     The quick brown fox jumps over the lazy dog.
42     The default value should be added at the end regardless.
43 :param m: Tab.
44 :param n: This argument's default value is undefined.
45
46     The description for ``d`` lacked a fullstop at the end, but one was added_
47     ↪automatically.
48
49     The default value of ``n`` was ``Ellipsis``, but it wasn't shown.
50 """
```

The PEP 484 type hints were added by sphinx-autodoc-typehints.

OVERVIEW

`default_values` uses `tox` to automate testing and packaging, and `pre-commit` to maintain code quality.

Install `pre-commit` with pip and install the git hook:

```
$ python -m pip install pre-commit  
$ pre-commit install
```

**CHAPTER
SIX**

CODING STYLE

`Yapf` is used for code formatting, and `isort` is used to sort imports.

`yapf` and `isort` can be run manually via `pre-commit`:

```
$ pre-commit run yapf -a  
$ pre-commit run isort -a
```

The complete autoformatting suite can be run with `pre-commit`:

```
$ pre-commit run -a
```

**CHAPTER
SEVEN**

AUTOMATED TESTS

Tests are run with `tox` and `pytest`. To run tests for a specific Python version, such as Python 3.6, run:

```
$ tox -e py36
```

To run tests for all Python versions, simply run:

```
$ tox
```

**CHAPTER
EIGHT**

TYPE ANNOTATIONS

Type annotations are checked using mypy. Run mypy using tox:

```
$ tox -e mypy
```

**CHAPTER
NINE**

BUILD DOCUMENTATION LOCALLY

The documentation is powered by Sphinx. A local copy of the documentation can be built with `tox`:

```
$ tox -e docs
```


DOWNLOADING SOURCE CODE

The `default_values` source code is available on GitHub, and can be accessed from the following URL: https://github.com/domdfcoding/default_values”

If you have `git` installed, you can clone the repository with the following command:

```
$ git clone https://github.com/domdfcoding/default_values"  
> Cloning into 'default_values'...  
> remote: Enumerating objects: 47, done.  
> remote: Counting objects: 100% (47/47), done.  
> remote: Compressing objects: 100% (41/41), done.  
> remote: Total 173 (delta 16), reused 17 (delta 6), pack-reused 126  
> Receiving objects: 100% (173/173), 126.56 KiB | 678.00 KiB/s, done.  
> Resolving deltas: 100% (66/66), done.
```

Alternatively, the code can be downloaded in a ‘zip’ file by clicking:

Clone or download → *Download Zip*

10.1 Building from source

The recommended way to build `default_values` is to use `tox`:

```
$ tox -e build
```

The source and wheel distributions will be in the directory `dist`.

If you wish, you may also use `pep517.build` or another **PEP 517**-compatible build tool.

[View the Function Index](#) or [browse the Source Code](#).

[Browse the GitHub Repository](#)

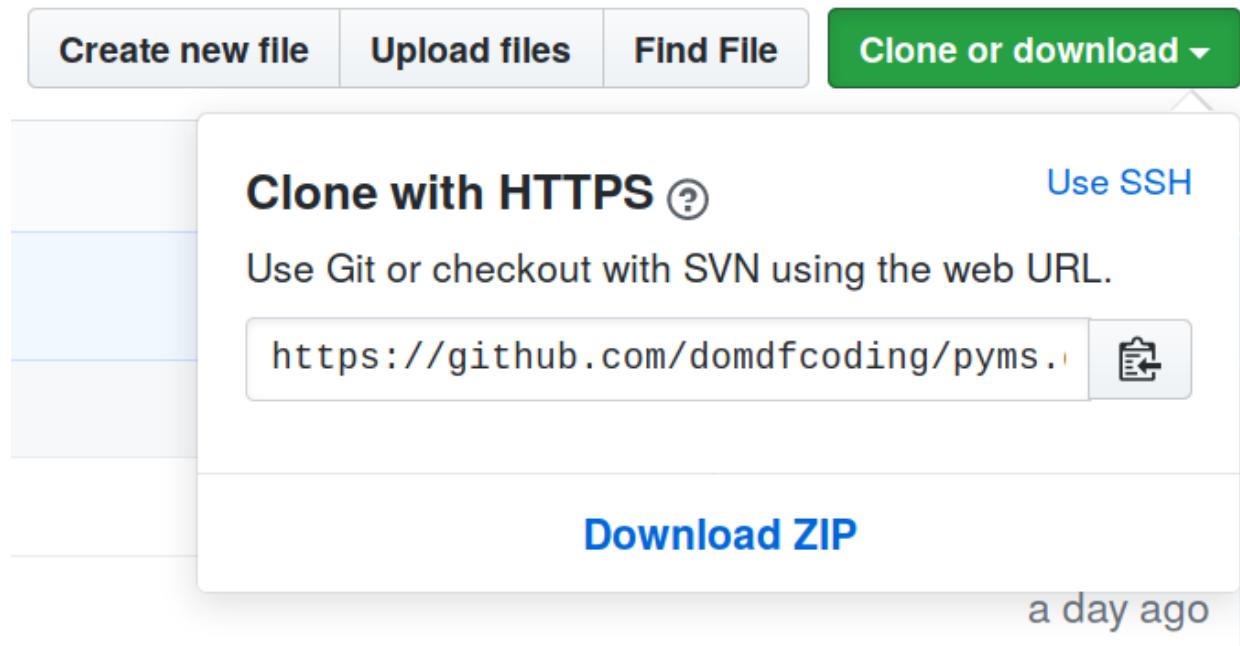


Fig. 1: Downloading a ‘zip’ file of the source code

PYTHON MODULE INDEX

S

`sphinxcontrib.default_values`, 9
`sphinxcontrib.default_values.demo`, 11

INDEX

D

`demo()` (*in module sphinxcontrib.default_values.demo*),
11

M

`module`
 `sphinxcontrib.default_values`, 9
 `sphinxcontrib.default_values.demo`,
 11

P

`process_default_format()` (*in module sphinx-contrib.default_values*), 9
`process_docstring()` (*in module sphinxcontrib.default_values*), 9
Python Enhancement Proposals
 PEP 484, 12
 PEP 517, 23

S

`setup()` (*in module sphinxcontrib.default_values*), 9
`sphinxcontrib.default_values`
 `module`, 9
`sphinxcontrib.default_values.demo`
 `module`, 11